


Molle a spirale

Per carico leggero SWF

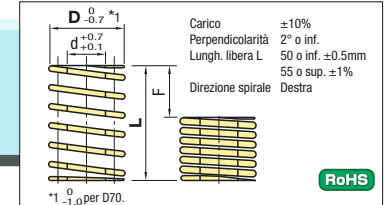

D	d	L	Costante molla N/mm(kgf/mm)	F=Lx40%		F=Lx45%		F=Lx50%		Codice componente D-L	Prezzo unitario
				Fmm	Carico N(kgf)	Fmm	Carico N(kgf)	Fmm	Carico N(kgf)		
6	3	15	7.8(0.80)	6.0	6.8	7.5	8.2	9.0	9.8	SWF6-15	20
		20	5.9(0.60)	8.0	9.0	10.0	11.0	12.0	13.0		
		25	4.7(0.48)	10.0	11.3	12.5	14.0	15.5	17.0		
		30	3.9(0.40)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	3.4(0.34)	14.0	15.8	17.5	19.0	20.5	22.0		
		40	2.9(0.30)	16.0	18.0	20.0	22.0	24.0	26.0		
8	4	10	15.7(1.60)	4.0	4.5	5.0	5.5	6.0	6.5	SWF8-10	10
		15	10.5(1.07)	6.0	6.8	7.5	8.2	9.0	9.8		
		20	7.8(0.80)	8.0	9.0	10.0	11.0	12.0	13.0		
		25	6.3(0.64)	10.0	11.2	12.5	14.0	15.5	17.0		
		30	5.2(0.53)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	4.5(0.46)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	3.9(0.40)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	3.5(0.36)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	3.1(0.32)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	2.9(0.29)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	2.6(0.27)	24.0	27.0	30.0	32.5	35.0	37.5		
		65	2.4(0.25)	26.0	29.3	32.5	35.0	37.5	40.0		
10	5	10	19.6(2.00)	4.0	4.5	5.0	5.5	6.0	6.5	SWF10-10	10
		15	13.1(1.33)	6.0	6.8	7.5	8.2	9.0	9.8		
		20	9.8(1.00)	8.0	9.0	10.0	11.0	12.0	13.0		
		25	7.8(0.80)	10.0	11.2	12.5	14.0	15.5	17.0		
		30	6.5(0.67)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	5.9(0.57)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	4.9(0.50)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	4.4(0.44)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	3.9(0.40)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	3.6(0.36)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	3.3(0.33)	24.0	27.0	30.0	32.5	35.0	37.5		
		12	6	15	18.3(1.87)	6.0	6.8	7.5	8.2		
20	13.7(1.40)			8.0	9.0	10.0	11.0	12.0	13.0		
25	11.0(1.12)			10.0	11.2	12.5	14.0	15.5	17.0		
30	9.2(0.93)			12.0	13.5	15.0	16.5	18.0	19.5		
35	7.8(0.80)			14.0	15.7	17.5	19.0	20.5	22.0		
40	6.9(0.70)			16.0	18.0	20.0	22.0	24.0	26.0		
45	6.1(0.62)			18.0	20.2	22.5	25.0	27.5	30.0		
50	5.5(0.56)			20.0	22.5	25.0	27.5	30.0	32.5		
55	5.0(0.51)			22.0	24.7	27.5	30.0	32.5	35.0		
60	4.6(0.47)			24.0	27.0	30.0	32.5	35.0	37.5		
65	4.2(0.43)			26.0	29.2	32.5	35.0	37.5	40.0		
14	7			20	17.7(1.80)	8.0	9.0	10.0	11.0	12.0	13.0
		25	14.1(1.44)	10.0	11.2	12.5	14.0	15.5	17.0		
		30	11.8(1.20)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	10.1(1.03)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	8.8(0.90)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	7.8(0.80)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	7.1(0.72)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	6.4(0.65)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	5.9(0.60)	24.0	27.0	30.0	32.5	35.0	37.5		
		65	5.4(0.55)	26.0	29.2	32.5	35.0	37.5	40.0		
		70	5.0(0.51)	28.0	31.5	35.0	37.5	40.0	42.5		
		75	4.7(0.48)	30.0	33.7	37.5	40.0	42.5	45.0		
80	4.4(0.45)	32.0	36.0	40.0	42.5	45.0	47.5				
85	4.1(0.42)	34.0	38.2	42.5	45.0	47.5	50.0				
90	3.9(0.40)	36.0	40.5	45.0	47.5	50.0	52.5				
100	3.5(0.36)	40.0	45.0	50.0	52.5	55.0	57.5				
Numero utilizzi				1 milione di volte		500,000 volte		300,000 volte			

D	d	L	Costante molla N/mm(kgf/mm)	F=Lx40%		F=Lx45%		F=Lx50%		Codice componente D-L	Prezzo unitario
				Fmm	Carico N(kgf)	Fmm	Carico N(kgf)	Fmm	Carico N(kgf)		
16	8	20	20.6(2.10)	8.0	9.0	10.0	11.0	12.0	13.0	SWF16-20	20
		25	16.5(1.68)	10.0	11.2	12.5	14.0	15.5	17.0		
		30	13.7(1.40)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	11.8(1.20)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	10.3(1.05)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	9.2(0.93)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	8.2(0.84)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	7.5(0.76)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	6.9(0.70)	24.0	27.0	30.0	32.5	35.0	37.5		
		65	6.3(0.65)	26.0	29.2	32.5	35.0	37.5	40.0		
		70	5.9(0.60)	28.0	31.5	35.0	37.5	40.0	42.5		
		75	5.5(0.56)	30.0	33.7	37.5	40.0	42.5	45.0		
18	9	20	25.5(2.60)	8.0	9.0	10.0	11.0	12.0	13.0	SWF18-20	20
		25	20.4(2.08)	10.0	11.2	12.5	14.0	15.5	17.0		
		30	17.0(1.73)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	14.6(1.49)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	12.7(1.30)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	11.3(1.16)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	10.2(1.04)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	9.3(0.95)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	8.5(0.87)	24.0	27.0	30.0	32.5	35.0	37.5		
		65	7.8(0.80)	26.0	29.2	32.5	35.0	37.5	40.0		
		70	7.3(0.74)	28.0	31.5	35.0	37.5	40.0	42.5		
		20	11	20	31.4(3.20)	8.0	9.0	10.0	11.0		
25	25.1(2.56)			10.0	11.2	12.5	14.0	15.5	17.0		
30	20.9(2.13)			12.0	13.5	15.0	16.5	18.0	19.5		
35	17.9(1.83)			14.0	15.7	17.5	19.0	20.5	22.0		
40	15.7(1.60)			16.0	18.0	20.0	22.0	24.0	26.0		
45	13.9(1.42)			18.0	20.2	22.5	25.0	27.5	30.0		
50	12.6(1.28)			20.0	22.5	25.0	27.5	30.0	32.5		
55	11.4(1.16)			22.0	24.7	27.5	30.0	32.5	35.0		
60	10.5(1.07)			24.0	27.0	30.0	32.5	35.0	37.5		
65	9.7(0.98)			26.0	29.2	32.5	35.0	37.5	40.0		
70	9.0(0.91)			28.0	31.5	35.0	37.5	40.0	42.5		
22	11			20	31.4(3.20)	10.0	11.2	12.5	14.0	15.5	17.0
		25	25.1(2.56)	12.0	13.5	15.0	16.5	18.0	19.5		
		30	20.9(2.13)	14.0	15.7	17.5	19.0	20.5	22.0		
		35	17.9(1.83)	16.0	18.0	20.0	22.0	24.0	26.0		
		40	15.7(1.60)	18.0	20.2	22.5	25.0	27.5	30.0		
		45	14.3(1.45)	20.0	22.5	25.0	27.5	30.0	32.5		
		50	13.1(1.33)	22.0	24.7	27.5	30.0	32.5	35.0		
		55	12.1(1.23)	24.0	27.0	30.0	32.5	35.0	37.5		
		60	11.2(1.14)	26.0	29.2	32.5	35.0	37.5	40.0		
		65	10.5(1.07)	28.0	31.5	35.0	37.5	40.0	42.5		
		70	10.0(1.00)	30.0	33.7	37.5	40.0	42.5	45.0		
		75	9.8(1.00)	32.0	36.0	40.0	42.5	45.0	47.5		
80	8.7(0.89)	34.0	40.5	45.0	47.5	50.0	52.5				
85	8.0(0.80)	36.0	45.0	50.0	52.5	55.0	57.5				
90	7.6(0.78)	38.0	50.0	55.0	57.5	60.0	62.5				
100	7.0(0.71)	40.0	55.0	60.0	62.5	65.0	67.5				
Numero utilizzi				1 milione di volte		500,000 volte		300,000 volte			

D	d	L	Costante molla N/mm(kgf/mm)	F=Lx40%		F=Lx45%		F=Lx50%		Codice componente D-L	Prezzo unitario
				Fmm	Carico N(kgf)	Fmm	Carico N(kgf)	Fmm	Carico N(kgf)		
25	13.5	25	39.2(4.00)	10.0	11.2	12.5	14.0	15.5	17.0	SWF25-25	25
		30	32.7(3.33)	12.0	13.5	15.0	16.5	18.0	19.5		
		35	28.0(2.86)	14.0	15.7	17.5	19.0	20.5	22.0		
		40	24.5(2.50)	16.0	18.0	20.0	22.0	24.0	26.0		
		45	21.8(2.22)	18.0	20.2	22.5	25.0	27.5	30.0		
		50	19.6(2.00)	20.0	22.5	25.0	27.5	30.0	32.5		
		55	17.8(1.82)	22.0	24.7	27.5	30.0	32.5	35.0		
		60	16.3(1.67)	24.0	27.0	30.0	32.5	35.0	37.5		
		65	15.1(1.54)	26.0	29.2	32.5	35.0	37.5	40.0		
		70	14.0(1.43)	28.0	31.5	35.0	37.5	40.0	42.5		
		75	13.1(1.33)	30.0	33.7	37.5	40.0	42.5	45.0		
		80	12.3(1.25)	32.0	36.0	40.0	42.5	45.0	47.5		
27	13.5	25	47.1(4.80)	10.0	11.2	12.5	14.0	15.5	17.0	SWF27-25	25
		30	39.2(4.00)	12.0	13.5	15.0	16.5	18.0	19.5		
		35									